

## PENNSTATE AGRICULTURAL & BIOLOGICAL ENGINEERING





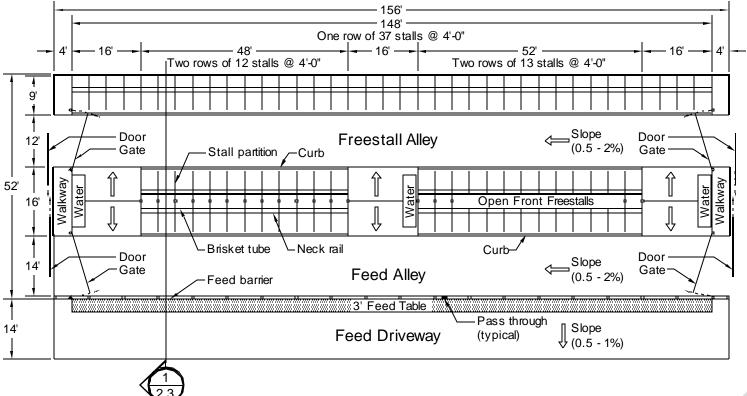

## Notes:

- Structural details to be designed and constructed in accordance with local codes and conditions.
- Provide a crossover every 15 to 20 stalls (60' 80').
- Provide minimum of two waterer locations per group and 3" of trough length per cow in all milking groups.
- Provide worker pass throughs at/in gates and spaced along feed barrier for safety and handling ease.
- Contact milk inspection agency when developing plans for milking cows.

## Related Detail Sheets :

- DIP 821 Cow Freestall (Cubicle), Types and Details
- DIP 831 Fenceline Feed Barriers
- DIP 841 Watering Locations for Dairy Cattle
- DIP 851 Freestall Crossovers and Floor Surface Details

THREE OUTSIDE FOR FREE PRINTERS THREE POUTSIDE FOR FREE PRINTERS OF THE PRINTE

No. DIP 203

